

EAGLE BRICK TIES

- Rated Earthquake heavy duty as per AS/NZS 2699.1:2000
- Tested and approved by Auckland University, UniServices report 7240.00

Specifications

- Made from high quality CR coil.
- Hot dipped galvanised to an average of 522 g/m²
- Available in three sizes to cover all your needs
- Supplied with fixing screws for wood or steel framing
- 250 tie packs (short and long)
- 200 tie packs (king) = 135mm long

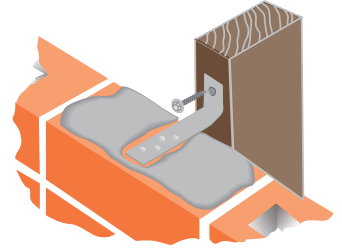


Fig.1 Supplied with screw fixings for wood or steel

Specialty Products Available

- Oamaru Stone ties available
- Longer ties available on request


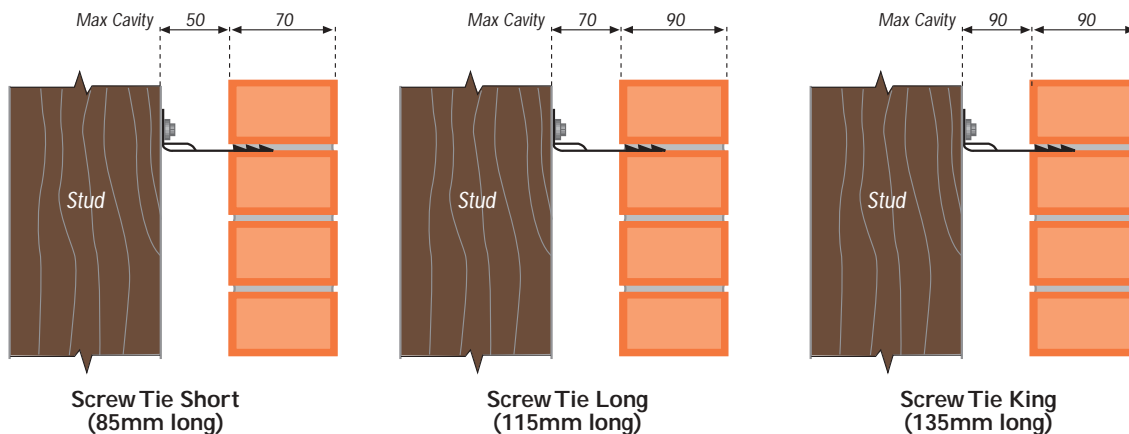


Fig.2 Ties available in 3 lengths

LOCATION	EAGLE PRODUCT CODE	DESCRIPTION
Sea Spray Zone*	BSC087	T316 Stainless Steel Short Tie
	BSS116	T316 Stainless Steel Long Tie
	BTK136	T316 Stainless Steel King Tie
Elsewhere	BSC085	Galvanised Short Tie**
	BSS115	Galvanised Long Tie**
	BTK135	Galvanised King Tie**

*Within 500m of the sea including harbours or 100m from tidal estuaries
 **Complies with zinc coating weight of 470g/m²



EAGLE WIRE PRODUCTS LTD

PO Box 58-068, Greenmount, Auckland. Phone 09-274 0621 Fax 09-274 0531

0800 EAGLEWIRE (0800 324 539) www.eaglewire.co.nz

MASONRY PRODUCTS

SNAKE WIRE

A 5.0mm galvanised wire used for general purpose reinforcement of masonry veneers and walls.

Specifications

- Suitable for use in 70mm and 90mm brick walls
- Lay in every 3rd or 4th mortar course for brick-fences and tie into columns if applicable
- Snake wire can be used to strengthen any structure where brick or concrete block has been specified
- Available in 1 metre and 3 metre lengths.

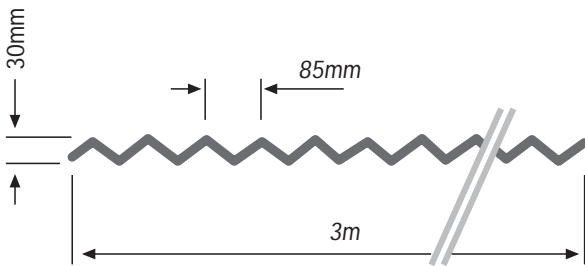


Fig.3 - Snake wire dimensions

RECTANGULAR CAVITY TIE

Galvanised Rectangular Box Tie, 185mm x 105mm for use in general masonry construction.

Specifications

- Used to tie two brick walls together. Space at 600mm centres along the wall and 350mm vertically
- Can be used anywhere in masonry walls to provide additional strength.

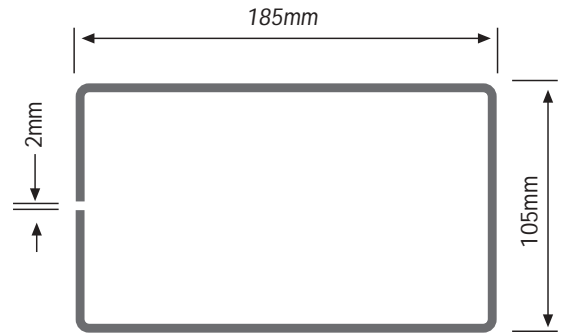


Fig.4 - Rectangular cavity tie dimensions

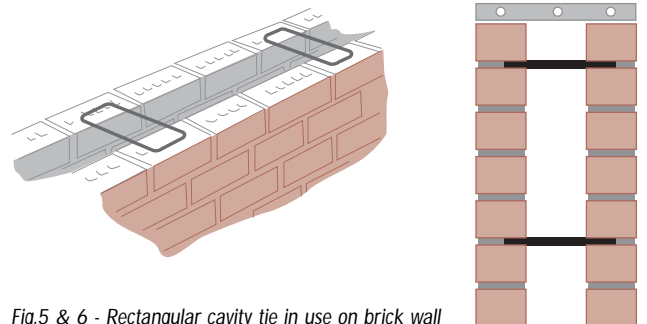


Fig.5 & 6 - Rectangular cavity tie in use on brick wall

WOVEN AIR VENTS


SIZES AVAILABLE

Specifications

- Woven wire panels for use in the ventilation of under house air spaces
- Made from galvanised wire for durability.

- 225 mm x 150 mm - standard
- 300 mm x 150 mm - standard
- 300 mm x 225 mm - standard
- 400 mm x 100 mm - standard
- 400 mm x 150 mm - standard
- 400 mm x 200 mm - standard
- 450 mm x 225 mm - standard

(minimum order of 20 required)

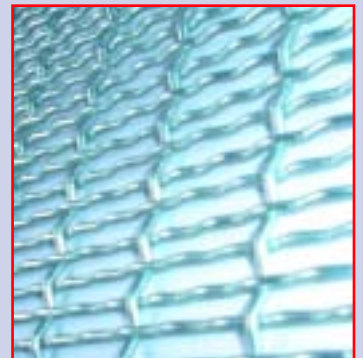

EAGLE WIRE PRODUCTS LTD

PO Box 58-068, Greenmount, Auckland. Phone 09-274 0621 Fax 09-274 0531

0800 EAGLEWIRE (0800 324 539) www.eaglewire.co.nz